


Datalogic PM8300 – RS-232 configuration

Scan the following barcodes:



Enter Configuration

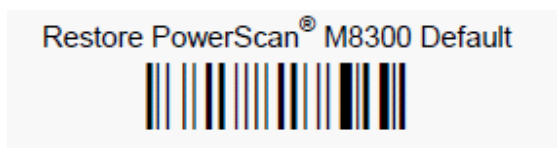

Set Radio Address



Scan the bar code on the base representing a number between 0001 and 1999.

Exit and Save Configuration



Bind



(The green light on the drive will flash)

Place the player on its base for about 10 seconds.

(The reader light will go out and the base will beeper)

Continue scanning the following barcodes:

COMMUNICATION RS-232

Standard



Enter Configuration



19200 baud



timeout control in reception from Host



0



0

RADIO PROTOCOL TIMEOUT

radio protocol timeout



0



4

RADIO RX TIMEOUT

always on



POWER-OFF TIMEOUT

power-off timeout



0



1

DISPLAY-OFF TIMEOUT

timeout



9



9

SCREEN REFRESH

Disable



Exit and Save Configuration



Test using HyperTerminal (or a program of the same type) with the parameters
"19200-8-1-None"

In ChronoMEDIC, install the Standard drive.