

If there is a problem with the configuration, you can start from the beginning by scanning this



Restore Custom Default Configuration

code:

If the drive has already been configured with another base, you can disconnect it by scanning this code, weigh again on the trigger and drop the drive on the base and after releasing the trigger. Waiting for a BEEP – BEEP – BEEP




Unlink

Install the USB-COM software (Downloader the latest version of the Datalogic site)

Connect the base to an electrical outlet

Scan the code below:

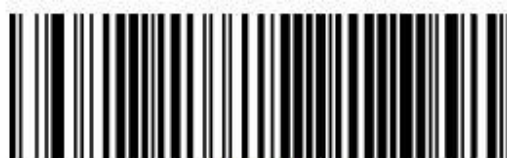

Select USB COM-STD<sup>a</sup>

Wait 10 seconds

Scan the code below:



Enter/Exit Programming Mode

CONFIGURATION DATALOGIC PM9300

Scan the codes below:

